

Release Note of Intercom V1.4.71







Firmware: V1.4.71 build 20170515

Software: V2.6.1.58 build 20170506 (Customization version based on software baseline V2.6.1.6)

Note: Intercom fw V1.4.71build20170515 has to work with software V2.6.1.58build20170506

New Features:


1. Support more than 20 kinds of language (one package supports 5 languages);

 VIS_20_A_EN_STD_V1.4.71_170515-1.zip
 VIS_20_A_EN_STD_V1.4.71_170515-2.zip
 VIS_20_A_EN_STD_V1.4.71_170515-3.zip
 VIS_20_A_EN_STD_V1.4.71_170515-4.zip
 VIS_20_A_EN_STD_V1.4.71_170515-5.zip
 VIS_20_A_EN_STD_V1.4.71_170515-6.zip

Firmware Language:

-1: English, France, Germany, Dutch, Italy
-2: English, Portuguese, Spanish, Czech, Slovenia;
-3: English, Bulgaria, Rumania, Croatia, Greece
-4: English, Russian, Latvia, Lithuania, Estonia
-5: English, Serbia, Hungary, Poland, Hebrew
-6: English, Denmark, Sweden, Finland, Turkey

2. Single button villa door station DS-KV8102-IM/DS-KV8102-IP/DS-KV8102-VP could configure room No.;

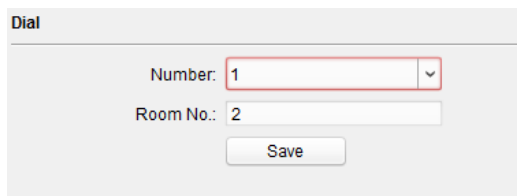

Dial


Number: 1

Room No.: 2

Save

3. When upgrade this new firmware, there don ' t need to restore default setting;
4. Audio button state/color on live view could change state when pressed;
5. Indoor station connected with Wi-Fi, and when you want to turn wifi off, you should input password to close, the password is the same as setting password;
6. Indoor station supports IPC sub stream 640*360, H.264;
7. Delete the door station prompt voice:” Sorry, I am not at home.... Pls leave a message” , and instead of “Sorry, the subscriber you dialed is not available now, please dial later” ;

8. Improve the audio tone for all intercom devices to be more sweet;
9. Fix indoor station ringtone issue: you can upload audio file to indoor station by 4200, and you can choose the audio you uploaded as ringtone. The audio should be WAV, 8KHz, single track. You can use the software VLC media player to transfer the audio format.



10. When indoor station ringing, the alarm out 1 could be triggered.
11. Fix the issue of email linkage function: add the item of "port" and "SSL/TLS"
12. Villa door station supports standard SIP (only audio, no video). you can choose the villa door station SIP working mode on iVMS4200. When villa door station working on standard SIP, villa door station could call SIP phone and open door by pressing "*" button.

